

Rec'd PCT/PTO 29 APR 2005

PCT/GB 2003 / 0 0 4 8 3 9



INVESTOR IN PEOPLE

10/533319

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 29 DEC 2003

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


Dated

17 December 2003

**BEST AVAILABLE COPY**

Patents  
(Rule 16)

1977



The  
Patent  
Office

1/77

15NOV02 E763781-1 002536  
P01/7700 0.00-0226683.1

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

MADE UP IN OFFICE

1. Your reference

2. Patent application number

(The Patent Office will fill in this part)

0226683.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Kuerner Alffield Products  
Howarth Ave  
Kirkhill Ind Esc  
Dyce  
Aberdeen AB21 0TP  
Great Britain  
(A/L dated 23.12.02)

4. Title of the invention

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it)

Basilas Horton  
FEDDEN HOUSE  
DOWER MEWS  
High Street  
BERKHAMSTEAD  
HERTFORDSHIRE HP4 2BL

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

8

Claim(s)

2

Abstract

1

Drawing(s)

3 + 3

*W*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

✓

Request for preliminary examination and search (*Patents Form 9/77*)

✓

Request for substantive examination (*Patents Form 10/77*)

✓

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

12. Name and daytime telephone number of person to contact in the United Kingdom

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

## Connector Assembly

### Field of the Invention

5 This invention relates to the provision of service lines, in particular but not exclusively electrical power to down hole equipment in oil wells, especially to those in extreme environments such as subsea where access is difficult. The invention also relates to the routing of a power connection or optical fibre connection through respective inner and outer cylindrical members of an oil well.

### Background to the Invention

10 Oilfield wells and wellheads have a generally common configuration with nested cylindrical members. Installation of the members progresses from outer larger diameter members to inner smaller diameter members that are hung or landed on inwardly projecting portions of the surrounding outer members. The upper portions of the cylindrical members, or hangars, are generally of a more substantial annular thickness than the rest of the cylindrical member that suspends from it.

20 At the production stage of a well, production tubing extends down to the production zone, from where, due to differential pressure in the reservoir, oil or other hydrocarbons flow up the production tubing providing there is no mechanical barrier or blockage. However, some reservoirs do not have a high enough pressure to produce naturally and some form of artificial lift is required.

25 One way of providing lift is by an electrical submersible pump (ESP) installed at the bottom of the production tubing to pump the oil up the tubing. Heaters and signal paths for control equipment may also be provided. The power and signal lines for these functions need to run with the production tubing down to the reservoir.

30 In many applications, electrical connections are made through the top of the tubing hangar. However, space is limited, and while top entry connection and other systems, can be satisfactory for signal paths where the power requirements are generally well

below 220 Watts and the cables are relatively small and compact, there is a problem in routing the larger cables required for the substantial power requirements of equipment such as electrical submersible pumps which may require over 1KW, often 5KW or more. For example it may require the production bore to be off-centre, which has serious operational implications in ensuring equipment is correctly aligned. Furthermore, the blow out preventer has to be removed for access to the top of the tubing hangar. The tubing hangar then provides the only barrier, which causes a safety problem if the well is live.

As with any well application, pressure sealing and access without having to shut off production are required or desirable.

One way of overcoming spatial problems of top entry is to provide connections via radial penetrations. However, these require that the connector bridge the annulus between concentric members and thus the connection has to be breakable in order to allow relative vertical movement of the concentric members.

US Patent 6,200,152 shows electrical power and signal connections using a radial penetration to avoid problems of connection via the top of the tubing hangar. A horizontal penetration passes through concentrically disposed casings, the inner casing being a tubing hangar and the outer casing a spool body. Seals are provided between the spool body and tubing hangar to enable formation of a sealed enclosure extending from a connector portion in the wall of the tubing hangar to a shuttle housing mounted externally of the spool body. A shuttle is reciprocable in the enclosure from a position within the spool body into contact with the connector portion in order to make electrical contact. It is necessary for the cable to be able to move to allow such shuttle movement. For signal cables a loose flexible coil of cable that can expand is used, but this has been considered not possible for substantial electrical power cables, and a sliding contact on a fixed power core is used instead.

Provision of a sliding contact is complex and it is generally desirable to have fixed contacts for electrical power connections as well as for electrical signal connections.

Problems may also arise in providing optical fibre couplings in that these are sensitive to bend radius and so loose coils are not always satisfactory.

### Summary of the Invention

5

The present invention is directed towards enabling utilization of a flexible coil in an electrical power connection or optical fibre connection for down hole equipment in an oil well by providing support for the coils which may assist or control their movement.

10

According to the invention there is provided a reciprocable connector assembly for coupling a service line through a path in a wellhead and hangar wall, the assembly comprising: a connector for coupling with a corresponding connector disposed in the hangar wall; a shuttle carrying said connector between a first position in which the connector is not coupled to the corresponding connector and a second position in which it is coupled, at least one service line connected at one end to the connector and wound in a plurality of turns to extend or retract with respect to one another as the shuttle moves between the first and second positions and a support for constraining movement of the turns.

15

20

### Brief Description of the drawings

The invention is now described by way of example with reference to the following drawings in which:

25

Figure 1 is a diagrammatic axial section through a wellhead assembly showing general routing of a power cable in a subsea wellhead.

Figure 2 is a vertical section showing an embodiment of a power connection in accordance with the invention;

30

Figure 3 is a diagrammatic plan section through a wellhead assembly showing the connector assembly of Figure 2 in a retracted, no electrical contact, configuration;

Figure 4 is a diagrammatic plan section similar to Figure 3 showing the connector assembly in the extended, making electrical contact, configuration; and .

Figure 5 is an enlarged plan view of part of the connected connector assembly of Figure 4.

### Detailed Description of Preferred Embodiments

Referring to Figure 1, the general wellhead arrangement of the routing of a power cable to a down hole pump is shown. Within the context of this description, a power connection is one generally rated above 110 volts and 2 amps (220 watts) but most frequently it will be very substantially above that, for example 1 to 5 KW or higher. The arrangement of the wellhead and tubing is of typical known configuration and is not described in detail. In the Figure a so-called horizontal tree 1 is shown in which oil from production tubing 10, with bore 13, is passed laterally to a horizontal continuation of the production bore. Production is aided by a down hole pump 5 to which a power cable 6, usually supplying three phase power, is connected. The cable 6 runs down the outside of the production bore within a tubing suspended from a tubing hanger 3 that is landed within the spool body of the horizontal tree 1. In environments such as subsea, the breakable connections need to be made remotely or by diver.

The power coupling passes through the walls of the tubing hanger and spool body of the tree and connection is made and broken via a reciprocable connector, detail of which is shown and described with reference to Figures 2 to 5. From Figure 1 it is significant to note that the power cable passes through the tubing hanger wall at a location above the production bore 13, which is an extension of the production tubing 10.

A sealed driving mechanism housing 16 attaches to the outside of the penetration through the spool body.

Tubing hanger seals 11 and 12 below the penetration through the hanger wall, a tubing hanger high pressure plug 14 above the penetration and tree cap 4 and plug 15 define,

with the housing 16, a sealed enclosure which is not located on the production flow path or in direct contact with the annuli of the production tubing.

5        Within the penetration a wetmate connection 7 can be made and broken. When the connection is broken, vertical movement of the hangar tubing, for installation or removal, is enabled. Externally of the spool the power cable connects to a wet-mate connector 8. Within the wellhead assembly the cable has a dry-mate connector 9 at the base of the tubing hangar 3.

10       Referring now to Figure 2, a vertical section through the pathway of the penetration and connector assembly is shown. The connector assembly 7 comprises the housing 16 mounted on and sealed to the spool body of the tree 1. Within the housing a drive member 23 reciprocates one connector member 21, in this embodiment a receptacle, into or out of connection with a cooperating connector member 22, in this embodiment a  
15       plug. The connector member 21 retracts to within the penetration of the spool body. It will be appreciated plug and receptacle functions may be interchanged or other forms of connectors provided.

20       The plug 22 is located within a horizontal portion of a penetration in the tubing hangar 3. After the location of the plug 22, the penetration changes direction and extends vertically down, emerging out of the base of the tubing hangar. The cable 6 is clamped to the outside of production tubing 10. The remaining part of the plug connector, shown as  
25       portion 29, extends through the vertical portion of the penetration. Various constructions are possible for implementing the horizontal to vertical change of direction of the conductors. For example conductor pins from plug 22 may connect to a set of conductors in portion 29 which are bent from horizontal to vertical, or the change of direction may be implemented by other means. For installation, the portions 22 and 29 are separable and a seal to the passageway and further connector 30 is at the exit of the passageway. This connector is part of dry-mate connection 9 (Figure 1).

30       Providing the vertical routing for the power connector in the tubing hangar enables more space and allows the production bore of the tubing hangar to be concentric with the spool body, which facilitates both installation and other interventions.



Turning now to Figures 3 to 5, the operation of the drive member and other features of the connector assembly can be seen.

5        Within housing 16, a cable 19 is provided which connects at one end 19a to the connector receptacle, it then winds helically around a spool 31 and exits the housing into arm 20 from where the cable extends to power connection 8 (Fig 1). The housing is sealed by an end cap 17.

10        As explained with reference to Figure 1, the penetration and housing are part of the sealed enclosure above the exit of the production bore and so it is not subject to extreme conditions. Thus the cable 19 does not need to be armoured, but may comprise just a main core and insulation. For this reason it is flexible enough to be wound in the helical configuration. The individual cores of the three phase cable may be separated and  
15        wound separately in order to provide more flexibility, or, depending upon power rating, may be wound together. The cores each engage with a respective pin on the plug connector. It would be possible to have separate shuttle mechanisms for each core, but it is preferred to require only a single operation.

20        Figure 3 shows the receptacle 21 disconnected from the plug 22, in the configuration that permits relative vertical movement of the tubing hangar. Figures 4 and 5 show the receptacle 21 translated into engagement with the plug 22. This translation is brought about by a pushing member 23 which is connected to a threaded rotary stem 18 that passes through the end cap 17. The stem 18 can be rotated externally by a diver or  
25        remotely operated vehicle to effect the coupling and decoupling as required.

By comparing Figures 3 and 4, it will be seen that turns of the helix of cable 19 have extended and translated along the spool as end 19a moves. There is sufficient flexibility in the cable turns to accommodate the required movement before the fixed point where  
30        the cable enters arm 20. The fact that the turns are supported by the spool 31 rather than loose during the translation constrains their movement to the axial direction. This encourages even movement and distribution of the extension and retraction of the turns with respect to one another. When there are multiple sets of single core turns the spool

or other form of support may be arranged to maintain their spatial separation. For example multiple spools may be provided. As shown the spool is static and the coil or coils slide over it, but it may be desirable to provide a translating spool in some circumstances. For example so that the pull on the turns can be distributed.

5 The spool may be a cylindrical member with a slot for the cable where it passes inside to connect to the receptacle, or the spool may be an open framework. Concentric spools for separated cores may be provided. Guide ridges or stops on the surface of the spool may be incorporated to confine the translation of one or more of the turns so as to ensure even  
10 movement. For very heavy cables, sliding carriers attached to the turns and sliding on the spool or in a track may be used.

As an alternative to a spool, other coil support may be provided. The objective is to assist even movement and resist entanglement or collapse. Conveniently the support,  
15 which could be a single rod (with or without stops or carriers) is located inside the turns of the cable. However, it may be possible to provide external support, for example from which the turns (or some) are hung.

A problem that can occur with location of a reciprocating member, is the alignment of  
20 the member with the tubing hangar penetration. For example if the tubing hangar 2 is located out of position as may happen due to debris accumulated on the landing shoulder or from machining tolerances. To overcome alignment problems the connector receptacle (see Fig 5) passes through a spherical joint 27 that is held in place between support members 25 and 26. The spherical joint allows some angular freedom of  
25 movement to the receptacle 21. Also, the spherical joint is mounted in a floating plate 28 providing freedom to float in the radial direction. A carrier plate 24 at the end of the receptacle away from the plug serves as a stop when reaching the end of the stroke required for mating, subject to the play allowed by the floating plate 28. In an alternative arrangement the compliance mechanism may be a plate mounted on springs,  
30 the plate behaving similarly to the sphere described above.

Although described in the context of a shuttle connector in a horizontal to vertical radial penetration, it will be appreciated that the connector may be utilised in other installation

configurations. For example the connection may be made with the penetration and connector angled downwardly rather than horizontal.

5 The arrangement of carried coils described for a power line is also useful for other service lines where bend radius is sensitive, for example with optical fibres. In such an arrangement optical connectors would replace electrical connectors and bend limiting sheaths may also be provided.

CLAIMS

1. A reciprocable connector assembly for coupling a service line through a path in a wellhead and hangar wall, the assembly comprising:

5 a connector for coupling with a corresponding connector disposed in the hangar wall;

a shuttle carrying said connector between a first position in which the connector is not coupled to the corresponding connector and a second position in which it is coupled,

10 at least one service line connected at one end to the connector and wound in a plurality of turns to extend or retract with respect to one another as the shuttle moves between the first and second positions.

15 and a support for constraining movement of the turns.

2. A reciprocable assembly according to claim 1 in which the service line is a power line.

20 3. A reciprocable assembly according to claim 2 in which the cores of the power line are wound in separate turns.

4. A reciprocable assembly according to claim 1 in which the service line is an optical fibre line.

25 5. A reciprocable connector according to any preceding claim in which the support constrains movement to axial movement.

30 6. A reciprocable connector according to any preceding claim in which the support is located internally of the turns.

7. An assembly for providing a service line connection through a wellhead member and tubing hangar, the assembly comprising:

a wellhead member having a first passageway through a wall thereof;

a hangar body having a second passageway therethrough and a coupling element disposed within the second passageway;

a reciprocable shuttle connector disposed for translation between a retracted position in which the shuttle connector and coupling element are not connected and an extended position in which the shuttle connector and coupling element are coupled,

at least one service line being fixedly connected to the reciprocable shuttle connector and looped in a plurality of supported turns that expand as the shuttle connector extends.

**Abstract**

A reciprocable connector assembly for coupling a service line through a path in a wellhead and hangar wall, the assembly comprising: connector for coupling with a  
5 corresponding connector disposed in the hangar wall; a shuttle carrying said connector between a first position in which the connector is not coupled to the corresponding connector and a second position in which it is coupled, at least one service line  
connected at one end to the connector and wound in a plurality of turns to extend or retract with respect to one another as the shuttle moves between the first and second  
10 positions and a support for constraining movement of the turns.

FIGURE 1

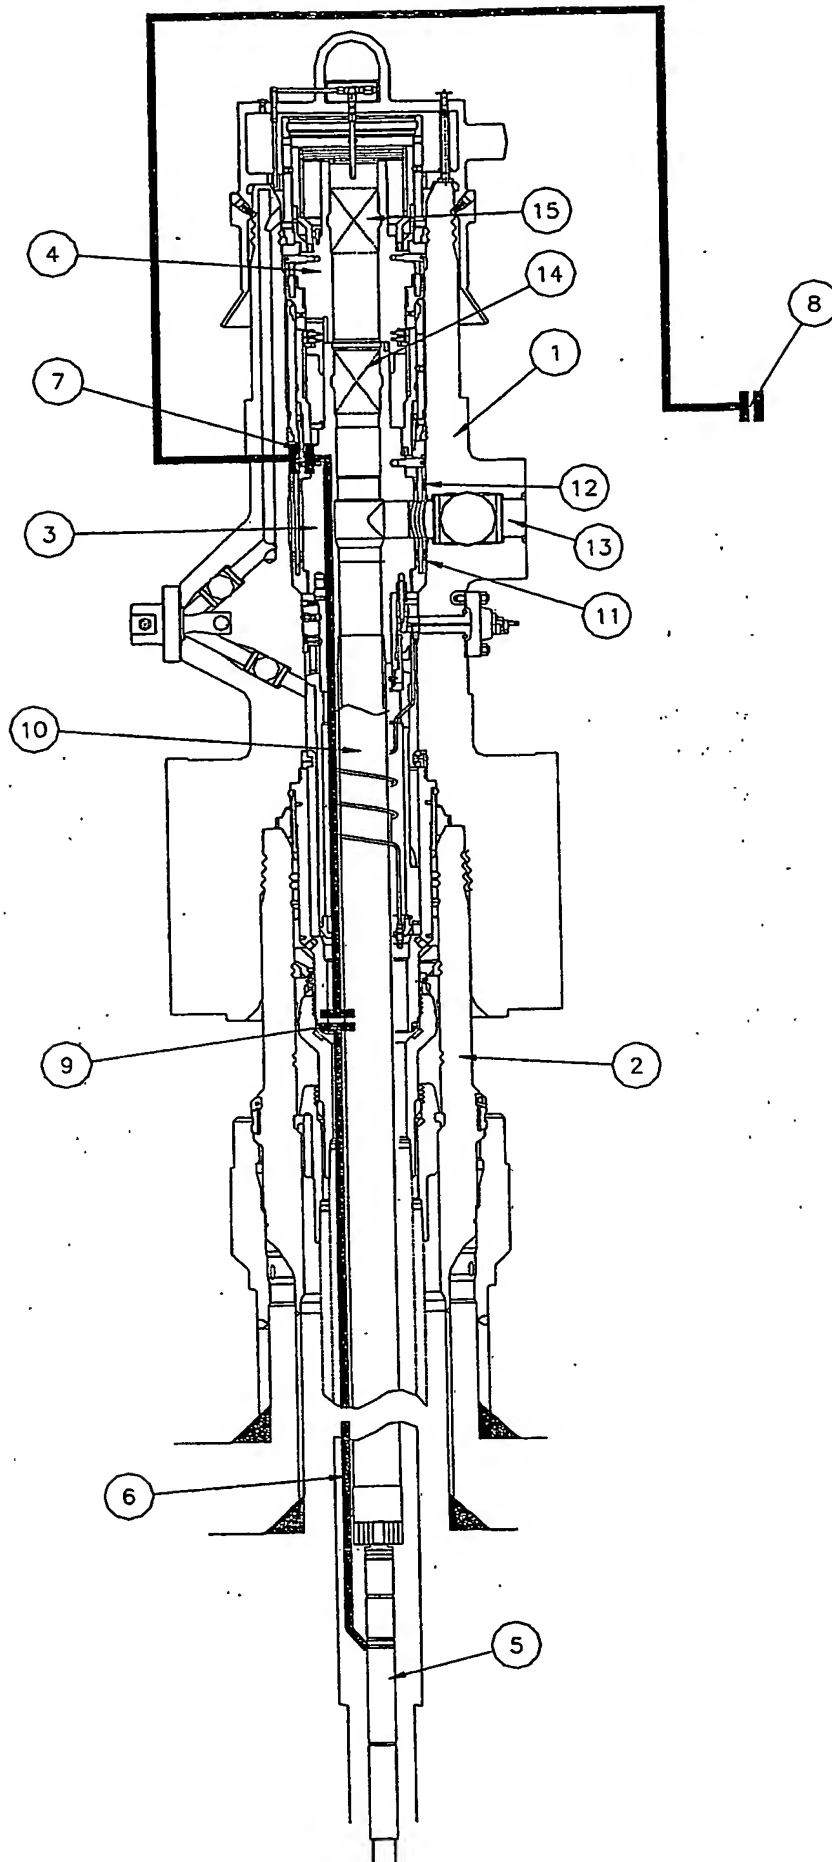


FIGURE 2

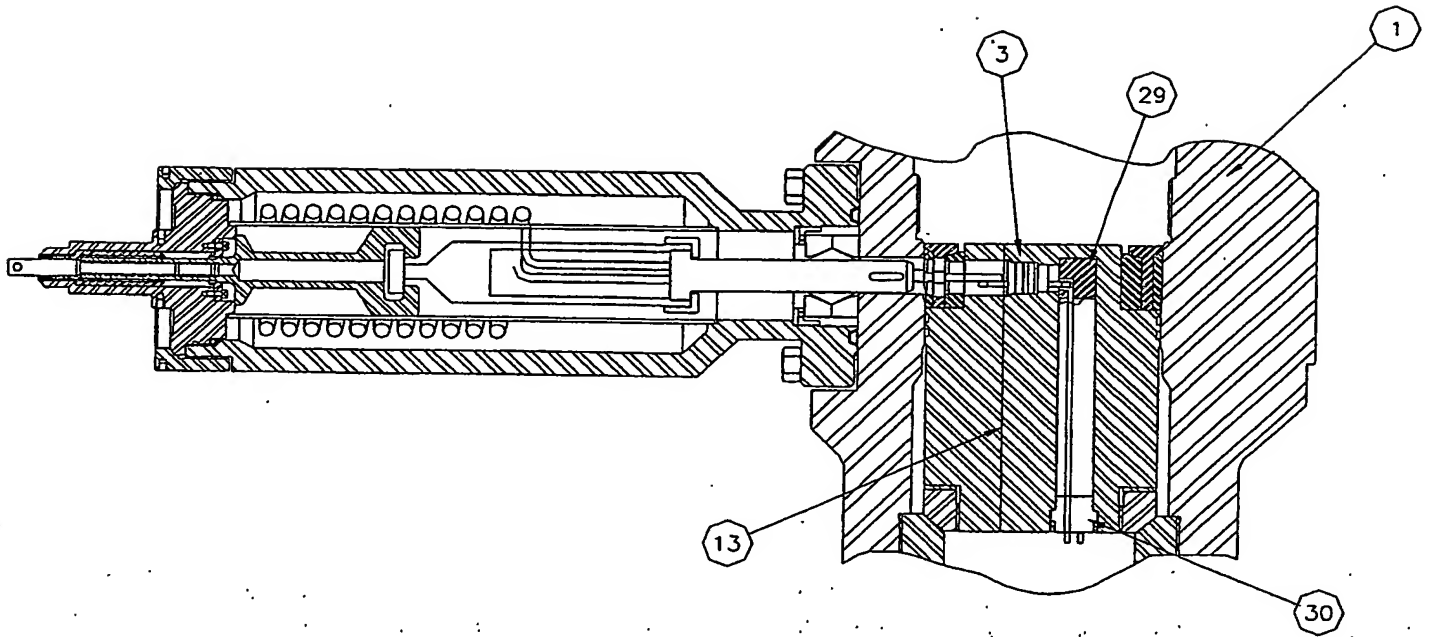


FIGURE 3

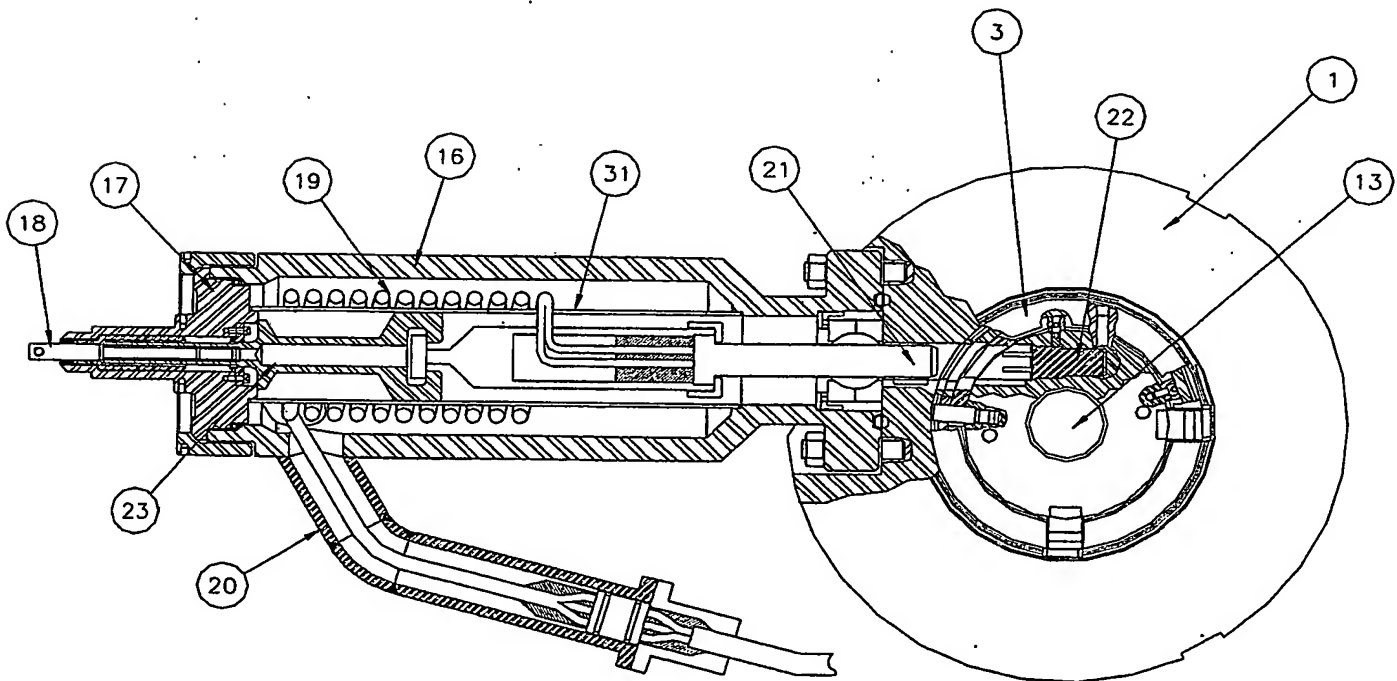




FIGURE 4


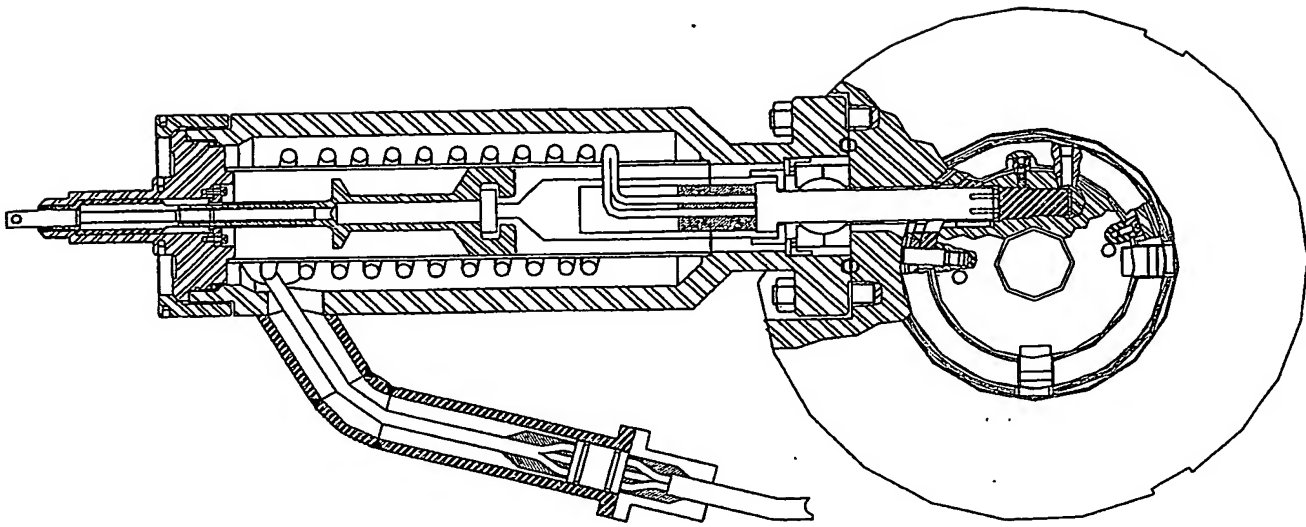


FIGURE 5

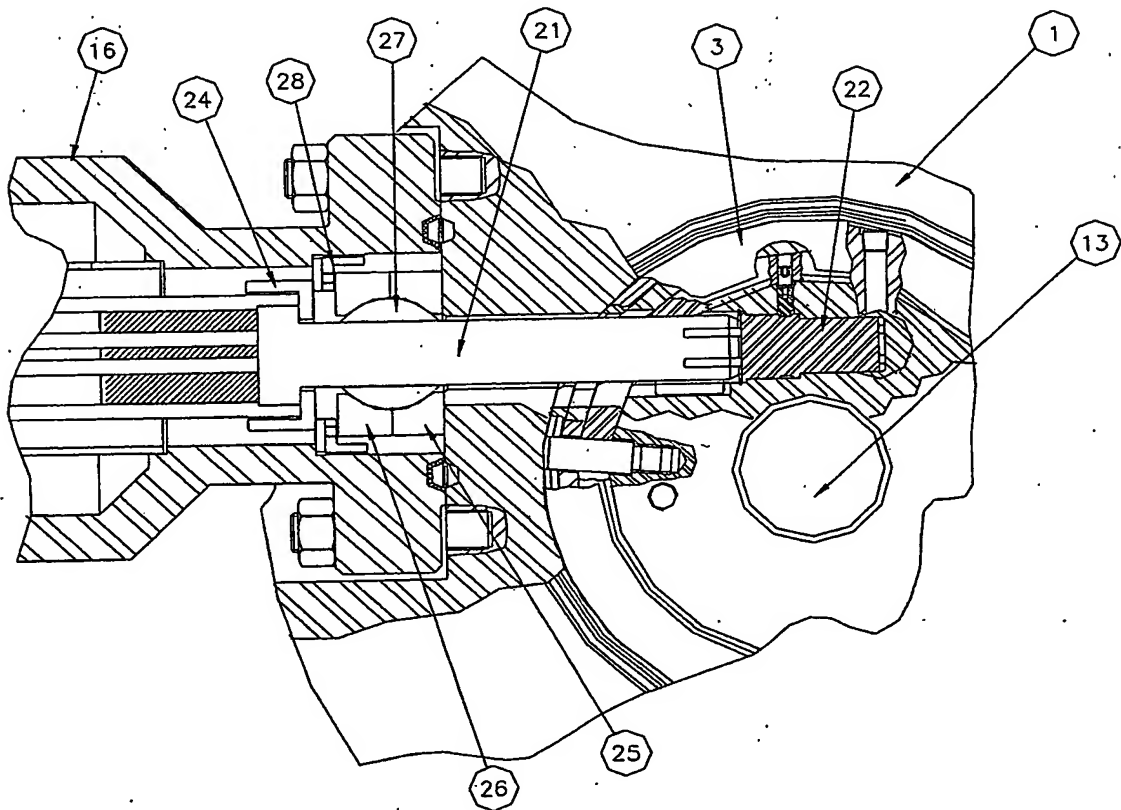

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**